




— Model —

NGE90-01
90GE-01
90AE-01

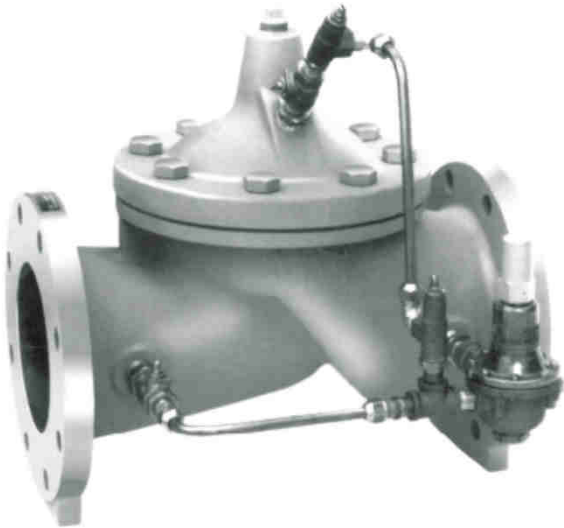


- Sensitive and Accurate Pressure Control
- Easy Adjustment and Maintenance
- Tamper Resistant
- Fully Supported Frictionless Diaphragm

The Cla-Val NGE, GE & AE series Pressure Reducing Valve automatically reduces a higher inlet pressure to a steady lower downstream pressure regardless of changing flow rate and/ or varying inlet pressure. This valve is an accurate, pilot-operated regulator capable of holding downstream pressure to a pre-determined limit. When downstream pressure exceeds the pressure setting of the control pilot, the main valve and pilot valve close drip tight.

Schematic Diagram

Model: NGE90-01 , 90GE-01 & 90AE-01
 (Previous Model: 690-01 , 90G-01 & 90A-01)

Item	Description
1	Hytrol (NGE, GE or AE Main Valve)
2	CRD Pressure Reducing Pilot
B	Spherical Valves
Y	"Y" Strainer

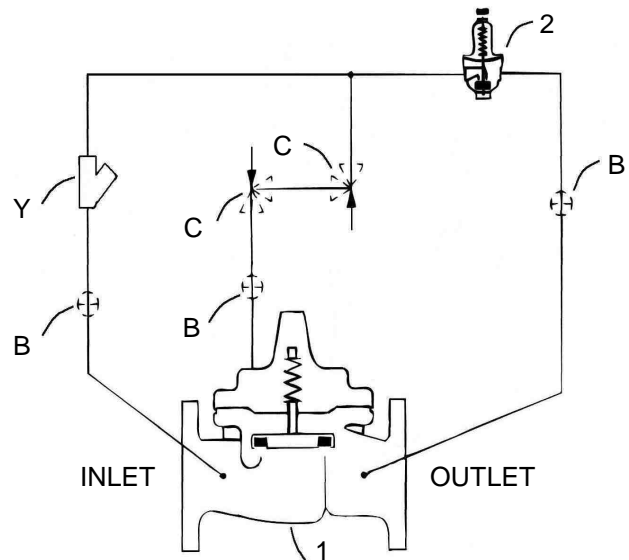



Optional Features

Item	Description
C	CV Flow Control Valve (Opening / Closing Speed Control)

Typical Applications


Typical pressure reducing valve station using NGE, GE or AE series in parallel to handle wide range of flow rates. Larger size valve takes care of peak loads and

The NGE, GE or AE series Pressure Reducing Valve is installed downstream of a pump where a constant system pressure is required.

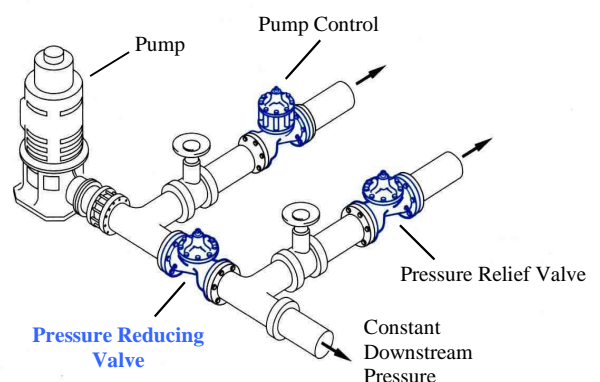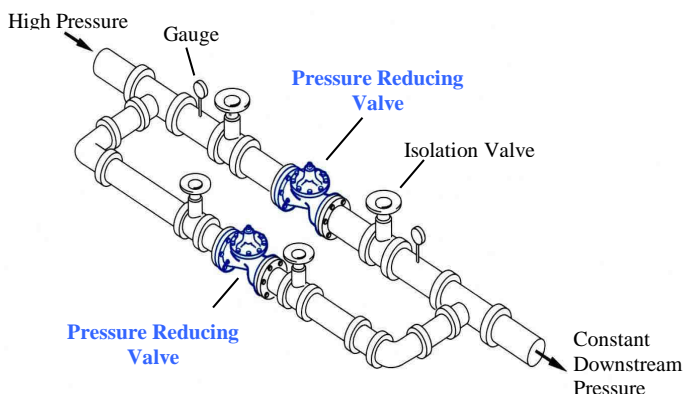

Pressure Reducing Valve

NGE Series Model: NGE90-01 (Previous model : 690-01) - Uses Basic Valve Series NGE

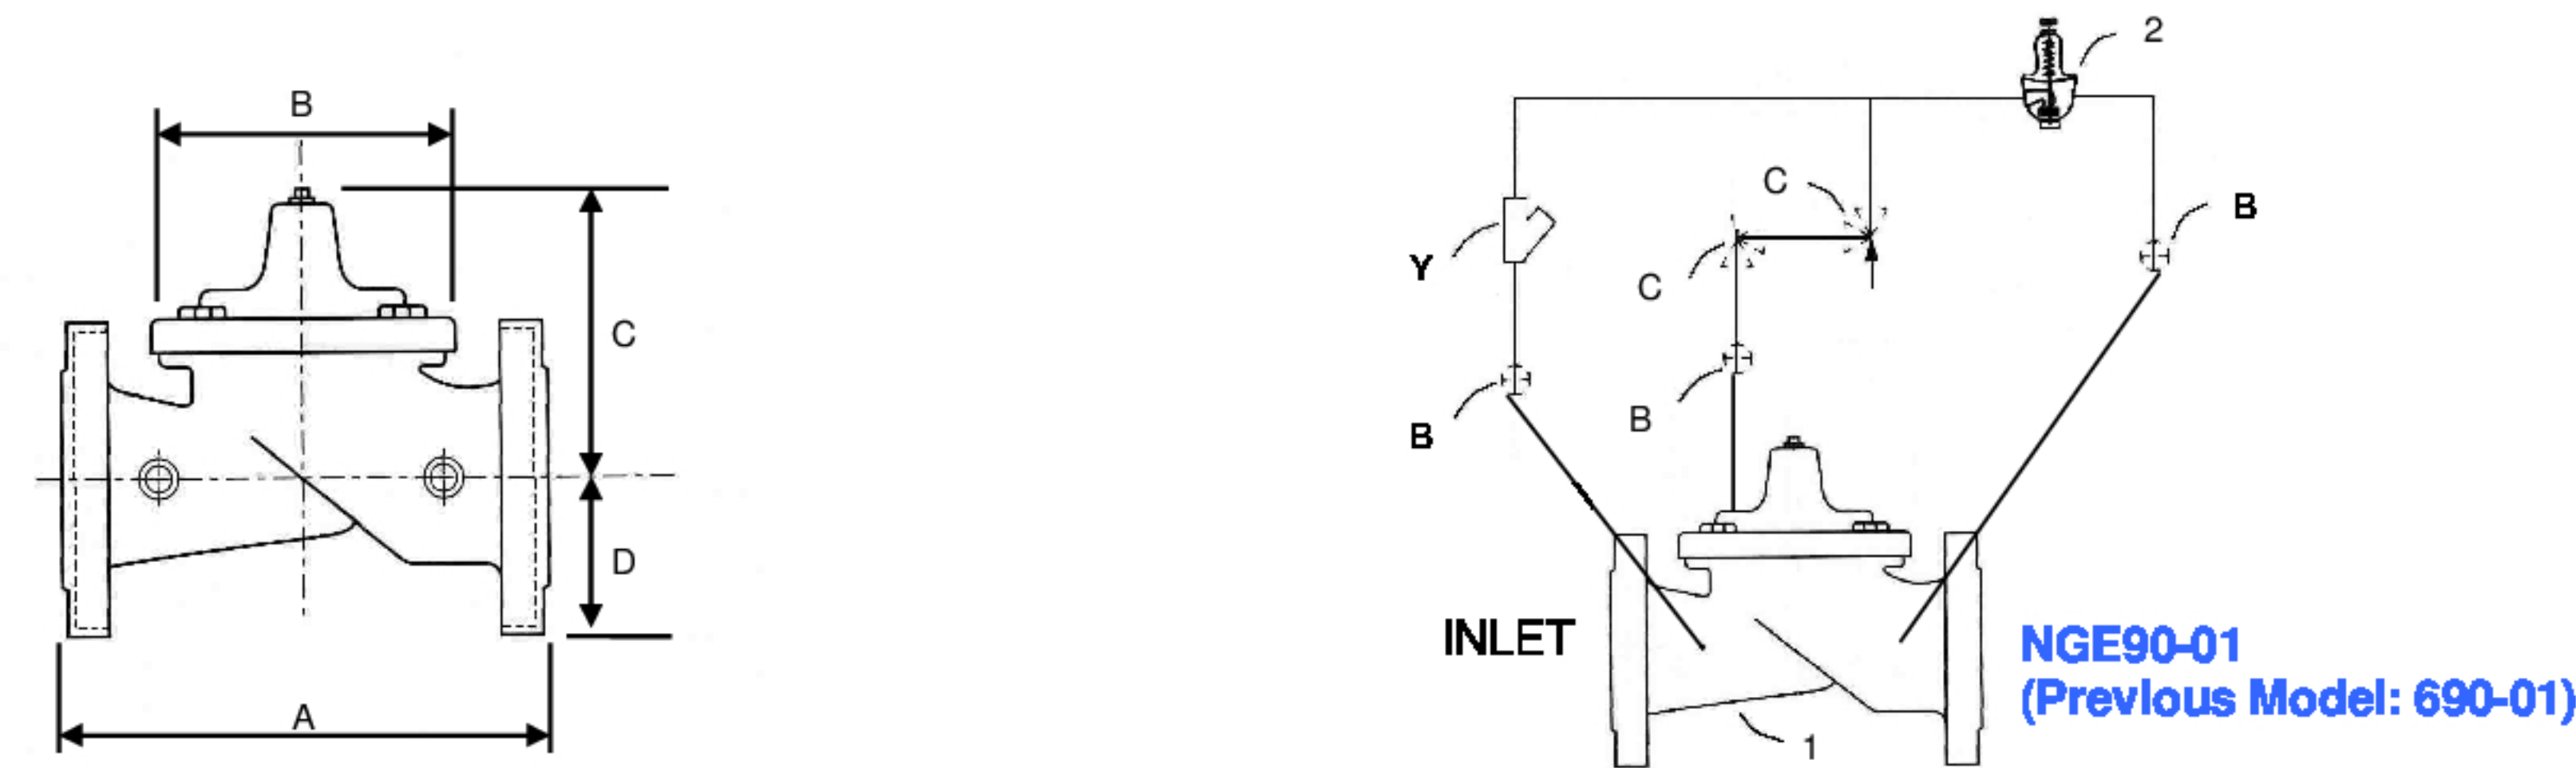

Dimensions

Size inch (mm)	50	65	80	100	150	200	250	300	350	400	450	500	600	750	900	1000
A	216	279	260	353	451	543	660	762	870	889	1070	1219	1219	1607	1651	1930
B	143	203	168	232	292	400	508	600	698	711	900	900	900	1351	1422	1676
C	140	192	178	219	295	381	454	533	530	654	635	800	800	1116	1387	1562
D	64	89	95	114	140	171	203	241	279	298	403	370	432	505	648	711

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class		
		Flanged *		Screwed
Grade	Material	ANSI Standard	BS EN Standard	End Details
ASTM A536 (BSEN 1563)	Ductile Iron	Class 150	PN16	N/A
		250 psi		
Note: * Flanged valves comply with BSEN 1092 drilling				

Materials

Body & Cover	Ductile Iron (BS EN1563)*	
Disc Trim (Guide)	Stainless Steel (BS EN10283 Gr.1.4408)	
Seat	(Standard)	Stainless Steel AISI 316 to ASTM A743-CF-8M (BS EN10283 Gr.1.4408)
	(Option)	Stainless Steel AISI 316 to ASTM A743-CF-8M with Telfon Coated For Sea Water
Diaphragm	EPDM Rubber (WRAS Approved)	
Stem, Nut & Spring	Austenitic Chromium Nickel Stainless Steel (BS EN10088 Gr.1.4305)	

*Note: With Internal & External Epoxy coating (Blue Color)



E-724-01 (R-6/00)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

©COPYRIGHT CLA-VAL 2000 Printed in USA
Specifications subject to change without notice.

CLA-VAL SA

Chemin des Mesanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

www.cla-val.com

Represented By: